




FlexCard


FLEX-SW-30VDC-5A-SS

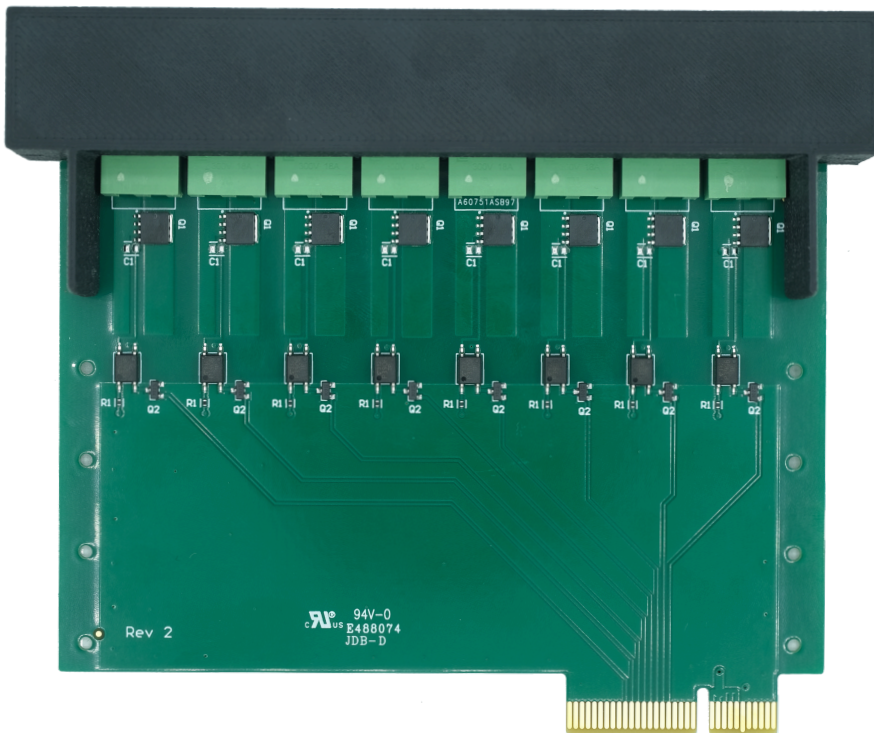

FLEXIBLE. PROCESS. CONTROL

Rev 1.0



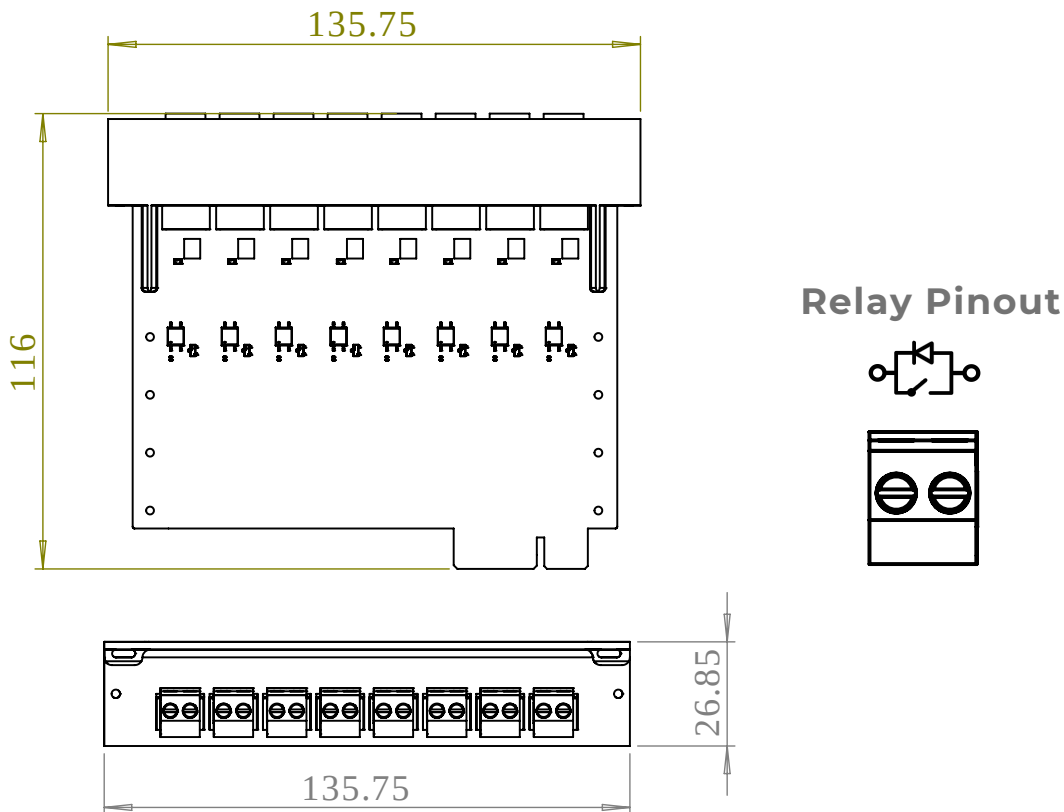

ELECTRICAL RATINGS

5A at 30V, Fully Isolated

PHYSICAL SPECIFICATION

Casing Material: Fibre Reinforced ABS

Dimensions: 116mm H x 135.75mm W x 26.85mm L

Weight: 98.6 grams

Screw Holes: 2x 1.5mm

OPERATING ENVIRONMENT

Operating Temperature: -40 °C to 85 °C

Operating Humidity: 10 % to 90 % non-condensing

REGULATORY & TYPE APPROVALS

Regulatory: CE - Low Voltage DC (not-applicable)